

Sub Sampler Pro

The Best Selling Heavy Duty Liquid Sampler


The Sub Sampler Pro (some times called a 'Bomb Sampler') is used throughout the world for both chemical and environmental sampling. Its unique double action means it can sample from a set distance from the bottom of a container or alternatively at a mid-point.



A. Sample from the bottom of a container

- Use a **Lowering Cable**


The Sub Sampler Pro is lowered until the plunger assembly touches the bottom of the container. As the plunger assembly is pushed up the sample is able to enter the device. When the sampler is raised the plunger will drop down and seal the sampler.



B. Mid-height Sampling

- Use a **Lowering Cable** and a **Control Line**

Lower the Sub Sampler Pro into the liquid. At the required sampling depth pull on the control line to raise the plunger. This will allow the liquid to enter the sampler. Release the control line and the plunger will drop down and seal the sampler.

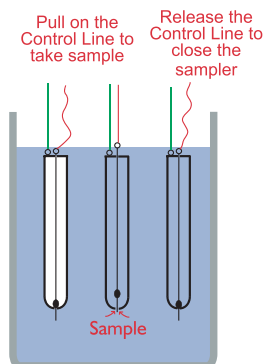

Part No.	Nominal Volume	Material	Dimensions (Diameter x Length)	Ex Rated
675 5072A500	500ml	Nickel plated brass	57 x 430mm	Yes*
675 5072B500	500ml	316 Stainless steel	63 x 280mm	No

* Make sure the sampler is properly earthed (grounded) use the Ex Hand Reel (5070D-05) and Copper cable (5070C)

QUOTE REQUEST ✓

BUY ONLINE ✓